



Post Pounders & Post Hole Augers

HIGH & HEAVY HITTER POST POUNDERS

Trailer side mast
3pt hitch side mast
3pt hitch center mast
Skid steer center mast

HIGH & HEAVY HITTER PLUS POST POUNDER


Trailer side mast
3pt hitch side mast

WATER SPIKE

POST HOLE AUGERS

COMPACT POST HOLE AUGERS

*Fencing
Equipment
Built Tough
to Take It!*

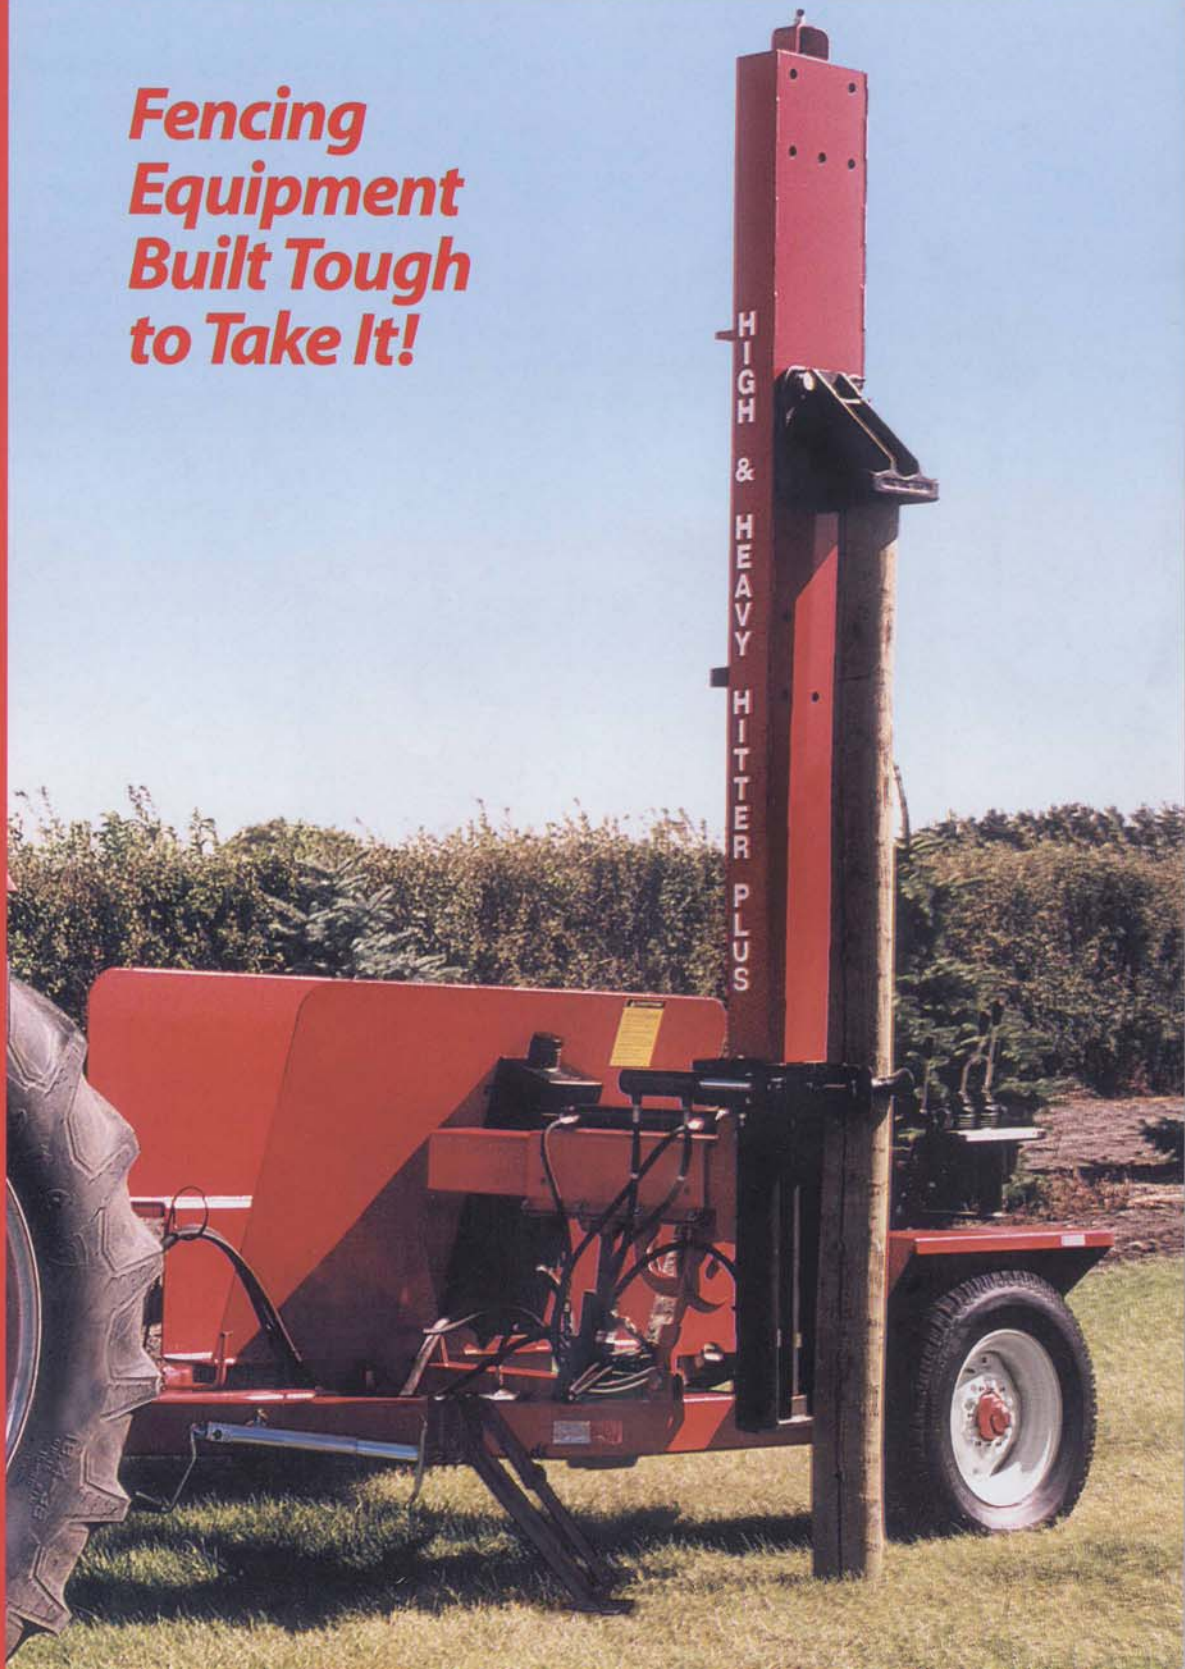

Whatever the ta

Wheatheart makes your fencing jobs easier! Choose from a 3pt hitch mount, versatile trailer version or skid steer mount

Trailer models offer a choice of self-contained PTO or Honda motor drive hydraulic system, while 3pt hitch models offer PTO pump self-contained system on side mast and optional self-contained or tractor hydraulics on center mast unit.

- Wheatheart Post Pounders are designed for ease of operation and low maintenance
- Greaseless horizontal poly slides
- Swivel control panel with joystick hydraulic controls
- Adjustable hammer height to accommodate different post lengths
- Trailer models have wide stance, weighted counter-balance/post carrier and low centre of gravity for balance and stability
- Side mast 3pt hitch models are counter balanced maintaining balance and stability
- Center mast models adapt to skid steer loaders and compact tractors (compact tractors must have front weights and/or a front end loader installed for safety and balance)
- 3pt hitch models are free standing for additional safety while attaching or detaching from the skid steer or tractor



Easy Operation



Operating the post pounder is made easy with our joystick hydraulic control lever. Activate the two hydraulic tilt cylinders with the conveniently located joy stick control. You can direct the four way tilt mast side to side and forward or backward allowing perfect post alignment in uneven terrain.

Put Posts Exactly Where You Want Them



All Wheatheart side mast Post Pounders offer 16" of lateral movement coupled with a four-way tilt mast, which allows side to side movement. This provides added post positioning and convenience for perfect post placement. Post Hugger (left), standard on all models, helps align posts for added convenience and safety.

sk, Wheathheart has a

High & Heavy Hitter Center Mast

Designed with all the heavy duty and hard hitting features as our original High & Heavy Hitter Series



Free standing for added stability while driving fence posts and easy storage

- Available with universal skid steer mount or Cat I or II 3pt hitch tractor adapter
- Universal mount plate provides for easy installation, taking only a few minutes to mount or detach from your skid steer
- 660lb heavy duty hammer drives wood or steel posts up to 12" in diameter into hard ground
- 64" stroke
- 4 head adjustments from 4'2" to 11'3"
- 3pt hitch model available with PTO or tractor supplied hydraulics
- Skid Steer model available with self-contained hydraulic drive or skid steer supplied hydraulics



Optional Pilot Auger Attachment



- Drills through any soil condition and most rock obstructions up to a 40" depth.
- Easy installation – mounts directly to driver mast, allowing you to tilt the pilot auger to the required angle.
- Down pressure cylinder allows operator to apply as much force on the auger bit as required.
- Hydraulic controls conveniently located by standard operator controls.
- A high torque, reversible hydraulic motor is coupled to a double bearing housing.
- Powered by tractor or skid steer hydraulics.
- Choice of 4 1/2" or 6" hard surfaced auger bits with replaceable carbide teeth.
- Minimum hydraulic requirements 10 gpm at 1600 psi.



Optional Self-Contained Hydraulic System


(available for Skid Steer Center Mast model only)

- The 4.5 cubic inch motor drives an efficient high volume pump
- The post pounder frame is utilized as an oil reservoir which dissipates heat effectively
- The self-contained hydraulic system eliminates any risk of oil contamination to the power unit



Universal Mount Plate

- Easy installation, taking only a few minutes to mount or detach from your skid steer

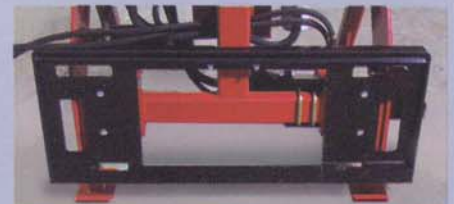


model for you!

Post Hole Augers Dig Deeper Holes Faster!

Universal Mount Post Hole Auger

- Quick-attach mounting bracket fits all tractor and skid steer buckets
- Powerful hydraulic drive with 3:1 chain reduction
- Dual pivot points make auger self-aligning
- Quick-detach replaceable cutting teeth and pilot bit
- Aggressive bit works in all types of soil conditions
- Optional carbide teeth
- Available in 4", 6", 9", 12" and 15" bits
- Optional universal skid steer mounting bracket

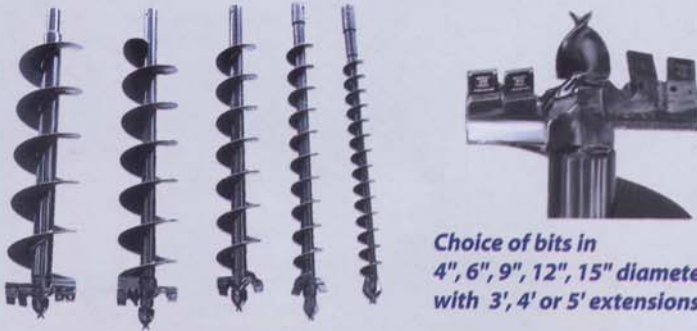

Choice of bits in
4", 6", 9", 12", 15" diameters
with 3', 4' or 5' extensions



**BUCKET MOUNT
POWERHEAD**
(185 lbs with quick attach)

Why a Bucket Mount vs 3pt hitch?

- Better visibility and more maneuverability
- Better penetration with more down pressure
- Reversible drive

Compact Post Hole Auger

(only available with 4" and 6" bits)

- Mounts to all compact tractor loader buckets
- Ideal for tractors under 45 HP
- Reverse function with hydraulic lever
- Self aligning
- One person quick-attach operation
- Replaceable cutting teeth and pilot bit



Optional skid steer
bracket shown

High & Heavy Hitter Side Mast

Pound Bigger Posts Faster

- Our most popular model for all heavy and light duty post placement
- Available in trailer mount and free standing Cat II 3pt hitch models
- 660 lb heavy duty hammer pounds posts in hard ground
- 4 head mounting positions
- 64" stroke
- Convenient post rack on trailer model
- PTO pump or 9 HP Honda motor on trailer model
- 3pt model requires a minimum 75 HP tractor



High & Heavy Hitter Plus Side Mast

Higher reach heavy duty model for game fencing and tall post applications

- Available in trailer mount and Cat II 3pt hitch models
- 720 lb heavy duty hammer
- Hammer height adjustable from 9'8" to 14'5"
- Additional weight ballast box for greater stability
- PTO pump or 13 HP Honda motor on trailer model
- Out rigger for additional stability on trailer model
- 3pt model requires a minimum 75 HP tractor



Optional Water Spike Kit

(for High & Heavy Hitter and High & Heavy Hitter Plus Side Mast trailer models)

Handy self-contained power wand cuts a pilot hole through the hardest ground.



- Finds hidden obstructions prior to post pounder operation
- Reduces pounder strokes by up to 50% and saves time
- Easy to use control valve
- Built-in splash guard
- Comes with 65 gal water tank, 42" wand and extra valve with connectors
- Operates at 2000-2200 psi utilizing 1.2 gpm of water
- Cuts approximately 1 1/2" OD hole in about 30 seconds

POST POUNDER SPECIFICATIONS

MODEL	HIGH & HEAVY HITTER SIDE MAST TRAILER	HIGH & HEAVY HITTER SIDE MAST 3PT HITCH	HIGH & HEAVY HITTER PLUS SIDE MAST TRAILER	HIGH & HEAVY HITTER PLUS SIDE MAST 3PT HITCH	HIGH & HEAVY HITTER CENTER MAST SKID STEER	HIGH & HEAVY HITTER CENTER MAST 3PT HITCH
TOTAL WT. (W/HUGGER)	2580lb 1170kg	2220lb 1007kg	2930lb 1329kg	2450lb 1111kg	1500lb 680kg	1410lb 640kg
HAMMER WEIGHT	660lb 299kg	660lb 299kg	720lb 326kg	720lb 326kg	660lb 299kg	660lb 299kg
TRANSPORT HEIGHT (2 - POSITION*)	8' 2", 8' 10" 249cm, 269cm	-	8' 9", 9' 5" 267cm, 287cm	-	-	-
SHIPPING HEIGHT (2 - POSITION*)	-	8' 2", 8' 10" 249cm, 269cm	-	8' 9", 9' 5" 267cm, 287cm	8' 2" 249cm	8' 2" 249cm
WIDTH (TRANSPORT)	7' 2" 218cm	6' 2" 188cm	7' 2" 218cm	6' 2" 188cm	36" 91cm	36" 91cm
LENGTH	10' 1" 307cm	5' 4" 163cm	10' 6" 320cm	5' 4" 163cm	43" 109cm	43" 109cm
HAMMER HEIGHT MAX (ADJUSTABLE**)	9' 6"-11' 11" 290cm-363cm	9' 6"-11' 11" 290cm-363cm	9' 8" - 14' 5" 295cm-439cm	9' 8" - 14' 5" 295cm-439cm	9' 6"-11' 3" 290cm-363cm	9' 6"-11' 3" 290cm-363cm
HAMMER HEIGHT MIN	4' 2" 127cm	4' 2" 127cm	4' 2" 127cm	4' 2" 127cm	4' 2" 127cm	4' 2" 127cm
STROKE	64" 163cm	64" 163cm	66" 168cm	66" 168cm	64" 163cm	64" 163cm
DRIVE	PTO PUMP DRIVE GAS (9HP HONDA)	PTO PUMP DRIVE	PTO PUMP DRIVE OR GAS (13HP HONDA)	PTO PUMP DRIVE	***SKID STEER HYD. †SELF CONTAINED HYD.	***TRACTOR HYD. ††SELF CONTAINED HYD.
HYDRAULIC REQUIREMENTS (MINIMUM)	-	-	-	-	10 GPM @ 1500 PSI 38 lpm @103bar	10 GPM @ 1500 PSI 38 lpm @103bar
TILT ADJUSTMENT - FRONT/BACK	30° (15° FROM VERT.)	30° (15° FROM VERT.)	30° (15° FROM VERT.)	30° (15° FROM VERT.)	26° (13° FROM VERT.)	26° (13° FROM VERT.)
TILT ADJUSTMENT - LEFT/RIGHT	50° (25° FROM VERT.)	50° (25° FROM VERT.)	50° (25° FROM VERT.)	50° (25° FROM VERT.)	40° (20° FROM VERT.)	40° (20° FROM VERT.)
TIRES	15"	-	15"	-	-	-

* 2-Position adjustable mast on side mast pounder models

** 4 Position adjustable bolt on cast head on High & Heavy Hitter pounder, 3 Position adjustable bolt on cast head on High & Heavy Hitter Plus Models

SKID STEER POST POUNDERS

Includes inline hydraulic oil filter on return line (self contained units only)

*** Requires return line plumbed directly into skid steer/tractor hydraulic oil reservoir.

† Self contained hydraulics has on board oil reservoir with pump & hydraulic motor driven by skid steer hydraulics.

†† Self contained hydraulics has on board oil reservoir with PTO pump driven by tractor pto.

POST HOLE AUGER POWER HEAD SPECIFICATIONS

MODEL	STANDARD	COMPACT
Height	90" 229 cm	61" 155 cm
Width	19" 48 cm	14" 36 cm
Depth	13" 33 cm	9 1/2" 24 cm
Weight	185 lbs 84 kg	57 lbs 26 kg
Hyd. Reg.	12 gpm @ 1500 psi 45 Lpm @ 103 bar	10 gpm @ 1400 psi 38 Lpm @ 97 bar
Torque	535 ft lbs @ 1500 psi 725 Nm @ 103 bar	250 ft lbs @ 1400 psi 339 Nm @ 97 bar
RPM	78 @ 12 gpm 78 @ 45 Lpm	125 @ 10 gpm 125 @ 38 Lpm

BIT SPECIFICATIONS

STANDARD	4" 10 cm	6" 15 cm	9" 23 cm	12" 30 cm	15" 38 cm	COMPACT	4" 10 cm	6" 15 cm
Length	5'6" 168 cm	6' 183 cm	6' 183 cm	6' 183 cm	5'8" 173 cm		4' 122 cm	4' 122 cm
Weight	35 lbs 16 kg	55 lb 25 kg	100 lb 45 kg	110 lb 50 kg	120 lb 54 kg		25 lb 11 kg	35 lb 16 kg
Teeth #	Fishtail bit	2	4	4	6		Fishtail bit	2
Flighting Thickness	1/4" 6.4 mm	3/8" 9.5 mm	3/8" 9.5 mm	3/8" 9.5 mm	3/8" 9.5 mm		1/4" 6.4 mm	3/8" 9.5 mm



REMEMBER: Do not operate equipment with safety devices removed



Wheatheart

Making Work Easier for You!

Sold and Serviced By:

Wheatheart Manufacturing
A division of Ag Growth Industries L.P.

3455 Idylwyld Dr. N.
Saskatoon, Saskatchewan • S7L 6B5
Toll free 1 877 934 0649
Phone 306 934 0611 • Fax 306 934 6020
Email sales@wheatheart.com
Web site www.wheatheart.com